




Anti-Static Line p/n ASL2650-C



The Anti-Static Line ASL2650-C is a discharge cable intended for use in helicopter hoist operations. ASL2650-C is equipped with a utility ring in the upper end which enables connection of, for example guide line/trail line when used together. The Utility ring has a breaking strength of 2000kg. All anti-static lines from Helisafe has a built-in weak-link in the upper end of the cable which breaks at $110\text{kg} \pm 20\%$. The upper wire loop is protected to avoid accidental connection of human cargo. The connector to the hoist hook is a stainless steel EN362 twist lock carabiner with captive pin that fits the utility eye on the most hoist hooks on the market. The stainless steel cable is pvc coated in yellow color with reflective stripe to make it highly visible during day and night operations and has a slim soldered lower end that minimize the risk of get caught.

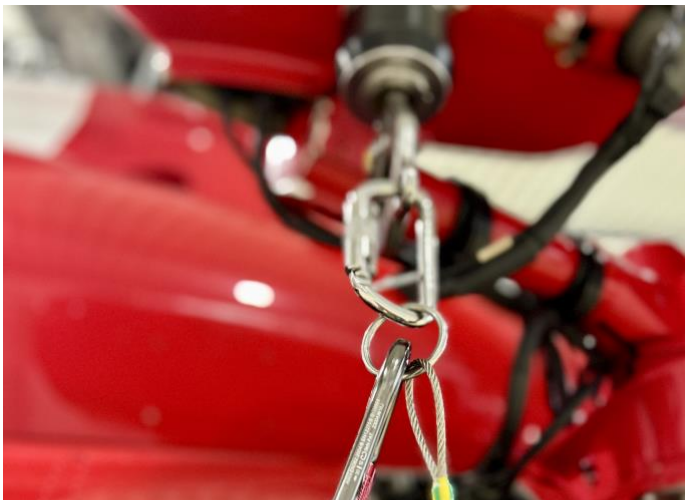

Connecting the guide line/trail line to the utility ring keeps the main hook free for human cargo only.

Technical data

Length: 2650mm

Material: Stainless steel 133-strand

Connector: EN362 Twist lock stainless steel carabiner.

Utility Ring: Stainless steel. 2000kg

Weak-link: $110\text{kg} \pm 20\%$

p/n: ASL2650-C